


ADDITIONAL BENEFITS

- Die modification **not required**
- **Minimal reduction** in stroke length when fitted
- **Available** with Front Flange assemblies
- **Can be** retrofitted to most Metrol gas springs
- **Easily** removed for gas spring overhaul and maintenance

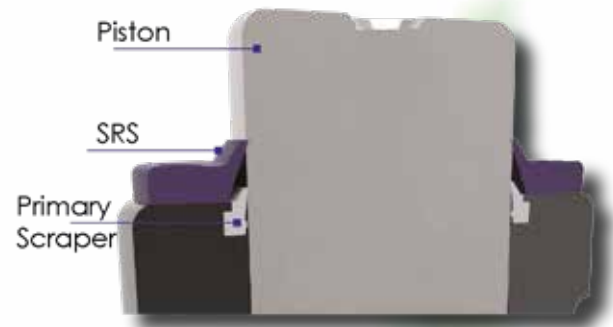

PART NO.	ROD DIAMETER	SRS HEIGHT	MINI SPRINGS	EX	G-EX	ISNG	MX	RSNG	DSNG
SRS-8	8mm	3mm	NG0	-	-	-	-	-	-
SRS-11	11mm	3mm	-	EX0170	-	-	-	-	-
SRS-12	12mm	3mm	NG1	-	-	-	-	-	-
SRS-15	15mm	3mm	-	EX0320	-	-	-	-	-
SRS-16	16mm	6mm	-	EX0360	G-EX0360	-	-	-	-
SRS-20	20mm	6mm	-	EX0500	G-EX0500	-	-	-	-
SRS-20-A	20mm	6mm	-	-	-	ISNG0500	-	-	-
SRS-25	25mm	6mm	-	EX0750	G-EX0750	-	-	-	-
SRS-25-A	25mm	6mm	-	-	-	ISNG0750	-	RSNG0750	-
SRS-28	28mm	6mm	-	EX1000	G-EX1000	-	MX1000	-	-
SRS-36	36mm	6.5mm	-	EX1500	G-EX1500	-	-	-	-
SRS-36-A	36mm	6.5mm	-	-	-	ISNG1500	-	RSNG1500	DSNG1500
SRS-45	45mm	7mm	-	EX2400	G-EX2400	-	MX2400	-	-
SRS-50	50mm	7mm	-	-	-	ISNG3000	-	RSNG3000	DSNG3000
SRS-60	60mm	7mm	-	EX4200	G-EX4200	-	MX4200	-	-
SRS-65	65mm	7mm	-	-	-	ISNG5000	-	RSNG5000	DSNG5000
SRS-75	75mm	7mm	-	EX6600	G-EX6600	-	MX6600	-	-
SRS-80	80mm	7mm	-	-	-	ISNG7500	-	RSNG7500	DSNG7500
SRS-90	90mm	9mm	-	EX9500	-	-	MX9500	-	-

**ENHANCED PROTECTION  
FOR EXTREME CONDITIONS**

