

MODEL	CHARGING PRESSURE (BAR)	FORCE (daN) @20° C		COLOUR
		INITIAL	END	
MNE24-020-XXX	20	23	39	Green
MNE24-040-XXX	40	45	80	Blue
MNE24-075-XXX	75	85	150	Red
MNE24-150-XXX	150	170	290	Yellow

SPECIAL STROKE SIZES AVAILABLE UPON REQUEST

TYPE	STROKE	L MIN	L
MNE24	10	55	65
	20	65	85
	30	75	105
	40	85	125
	50	95	145
	60	105	165
	70	115	185
	80	125	205
	100	145	245
	125	170	295


ORDERING EXAMPLE: **MNE24-1.5-020-010**

USE ONLY NITROGEN

MAX. PRESSURE: 150 BAR MIN. PRESSURE: 6 BAR MAX. PISTON VELOCITY: 1.6M/SEC



MET 9006
EJECTOR SPRING INSTALLATION TOOL

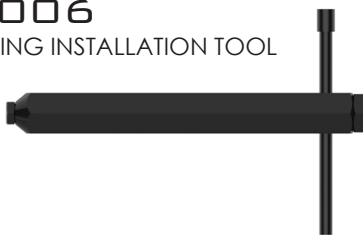


GAS SPRING FORCE CALCULATOR
www.metrol.com/gas-spring-force-calculator



MOUNTING EXAMPLES

(all dimensions are mm, unless otherwise stated)



Please note: gas springs should always be positively retained where possible.